



2018 / 2019

full product line



Grade	A
Coated Grade CVD	A002
Coated Grade PVD	A003
Ceramic	A005
Cermet	A005
CBN (T-CBN)	A006
PCD (T-DIA)	A007
Uncoated Cemented Carbide	A007
TurnLine	B
Insert	B002
External Toolholder	B182
Internal Toolholder	B280
Miniature Machining	B348
Threading	B410
GrooveLine	C
Parting, Grooving, and Groove-Turn system	C002
MillLine	D
High-Feed Milling	D002
Shoulder Milling	D032
Face Milling	D096
Slot Milling	D126
Profile Milling	D140
Multi-Functional Milling	D168
Milling Insert	D212
DrillLine	E
2 Effective Drill	E004
Indexable Drill	E066
Deep Hole Drill	E096
ToolLine	F
Tooling System	F002
User's Guide	G
Parts for Tool	G002
Technical Reference	G029
Alphanumeric Index	G084

Introduction

■ Icons along the right/left side of the page

Turning



Ext. toolholder



Int. toolholder



Miniature tool



Threading tool

Grooving, turning, and parting-off



Grooving, turning, and parting-off tool



Ext. grooving



Int. grooving



Face grooving



Parting-off

Milling



High-feed milling



Shoulder milling



Face milling



Slot milling



Profile milling



Multi-functional milling

Drilling



2-effective drill



Indexable drill



Deep hole drill

Tooling system



Tooling system

■ Icons in the chart section for each product

Threading



Ext. threading



Int. threading

Grooving



Ext. grooving



Ext. grooving and turning



Ext. grooving (full R)



Ext. grooving and turning (full R)



Forming



Int. grooving



Int. grooving and turning



Int. grooving and turning (full R)



Int. grooving (full R)



Parting-off



Face grooving



Face grooving and turning



Int. face grooving



Int. face grooving and turning



Face grooving for shaft

Milling



Shoulder milling



Deep shoulder milling



Shoulder milling (with radius)



Face milling



Slotting



Slotting (with radius)



Side slotting



Side milling



Pocketing



Ramping



Profiling



Plunging



Hole enlarging



Holemaking



Counterboring



Hole chamfering



Chamfering



Cutting-off

Drilling



Drilling



Small-diameter drilling



Deep-hole drilling



Hole chamfering



Tool kit



Oil hole



Oil hole for high-pressure


Introduction

■ Note in using this catalog:

- ★ This catalog provides the information of Tungaloy's cutting tools as of September 2017.
- ★ The specifications are subject to change without prior notice for product improvements. Also, the products may be discontinued in the future due to the development of new products.
- ★ The dimensions of all products are shown in inch (in) and millimeters (mm) where applicable.
- ★ For indexable tools, such as toolholders, cutters, drill bodies, applicable inserts or heads need to be ordered separately.

■ How to find a tool:

- ★ The catalog classifies the cutting tools into 5 lines – TurnLine (turning tools), GrooveLine (grooving tools), MillLine (milling tools), DrillLine (drilling tools), and ToolLine (tooling systems). The tools in each line are categorized by the applications.

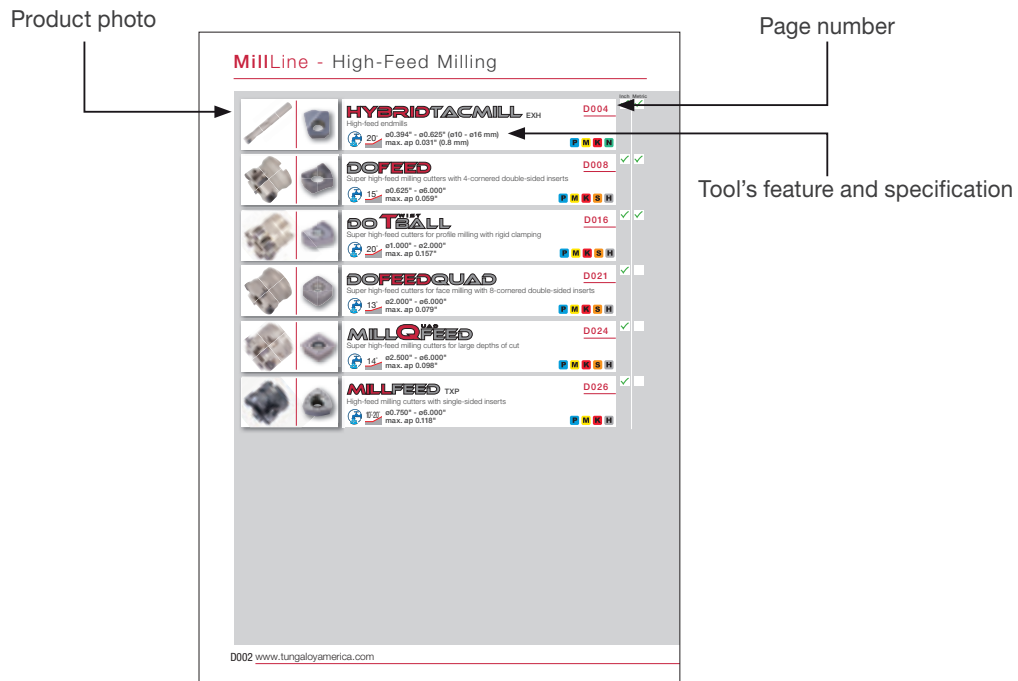

Example: Contents of the cutters for high-feed milling in MillLine

- ★ Alphanumeric index in User's Guide helps you search a specific product.

■ How to read the list for the standard items:

- ★ Designations for indexable tools – toolholders, cutters, drill bodies, etc.
 - Orders are to be received for the tools with the designations in the catalog.
 - For the tool with right- and left-hand options, the designation includes ****R/L**** as shown below.

Ex. 1: Designation: A12-SCLCR/L3-D16

You can order both right- and left-hand tools. A12-SCLCR3-D16 (a right-hand tool) and A12-SCLCL3-D16 (a left-hand tool) will be available.


Ex. 2: Designation: E10-SCLCR3-D14

You can order only right-hand tools. Please contact us when you need left-hand tools.

- ★ Line-up for inserts and solid tools

Blank : Please contact us regarding the product.

Grade

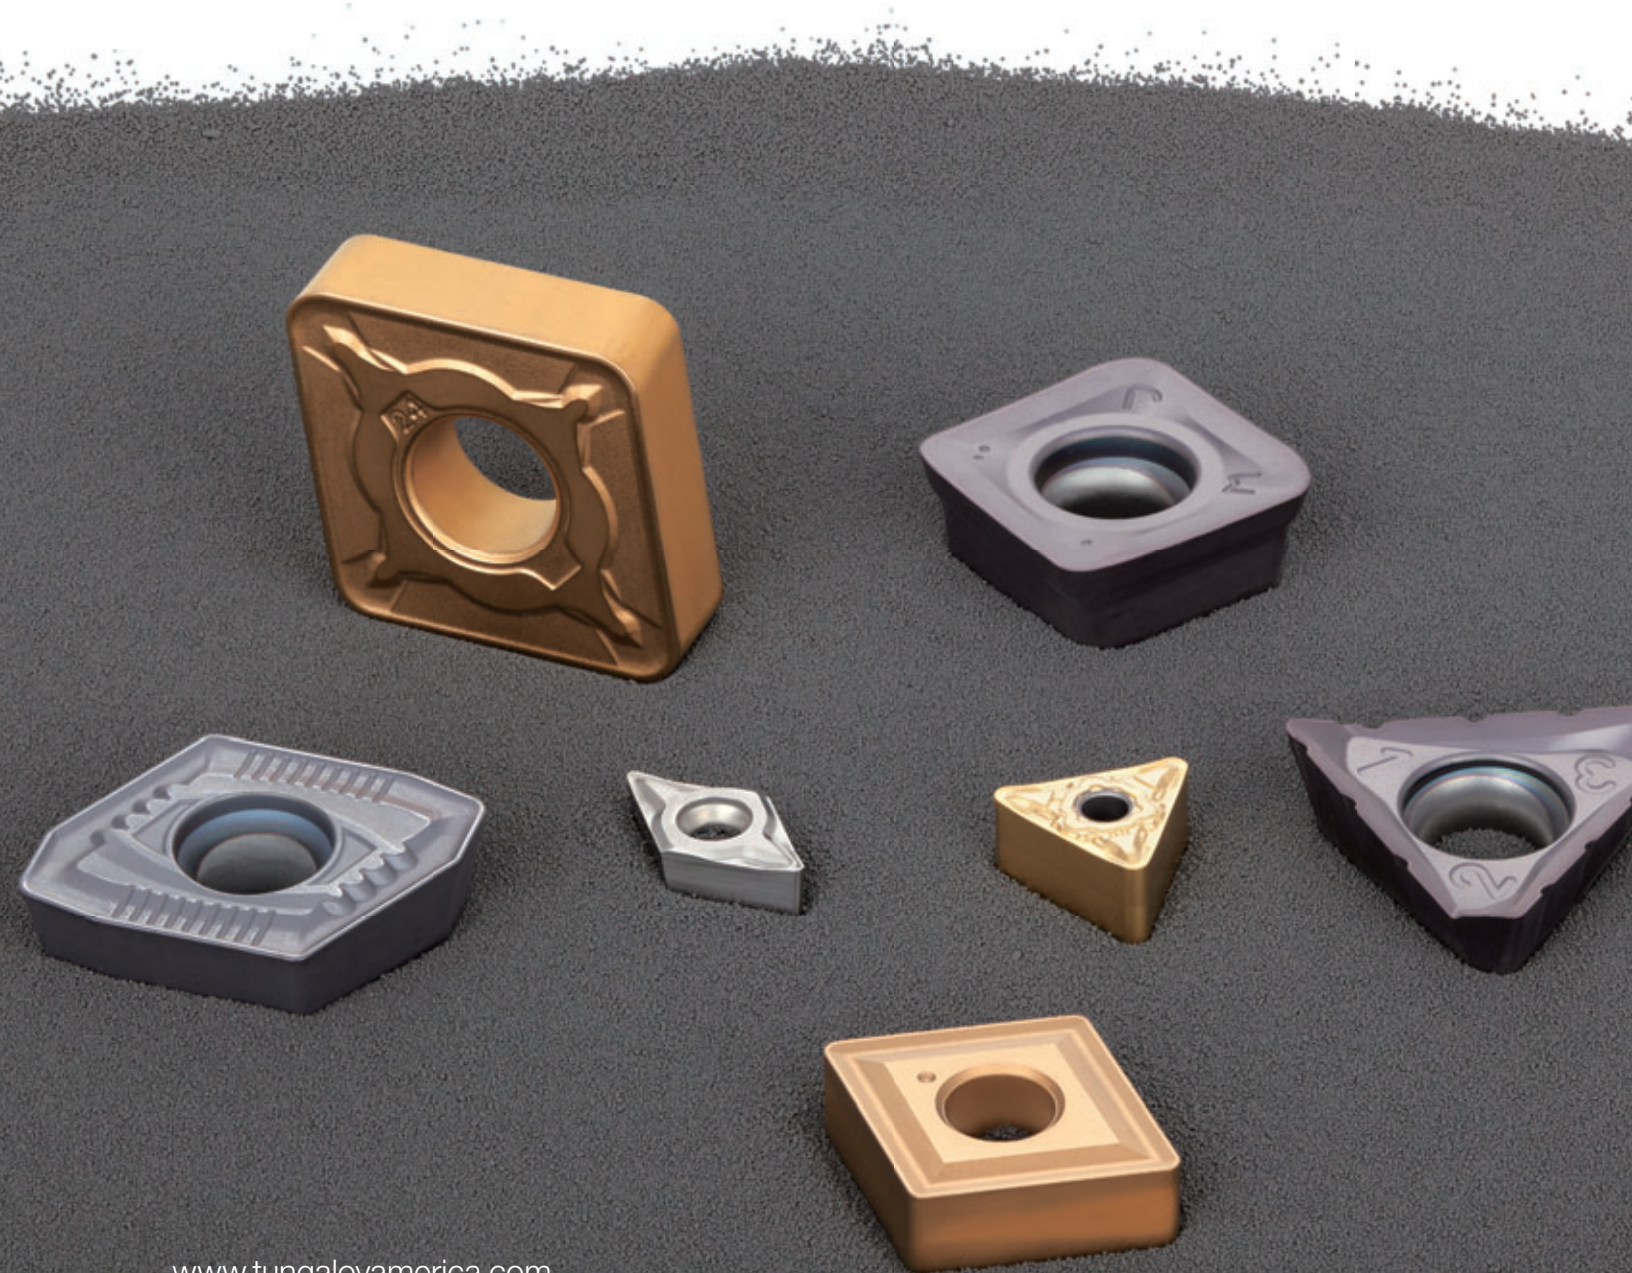

GRADE



Coated Grade CVD A002

Coated Grade PVD A003

Ceramic A005

Cermet A005

CBN (T-CBN) A006

PCD (T-DIA) A007

Uncoated Cemented Carbide A007

CVD - Coated Grade

Grade	Coating		Application	Feature	Turning	Grooving	Milling	Drilling
	Main composition	Thickness / μm						
T9105 P01 - P10 K10 - K20	TiCN-Al ₂ O ₃	16	P K	- Good wear resistance - Excellent performance in high-speed cutting				
T9115 P10 - P20 K15 - K30	TiCN-Al ₂ O ₃	16	P K	- Well-balanced between wear and chipping resistance - Suitable for a wide range of turning applications				
T9125 P20 - P30	TiCN-Al ₂ O ₃	16	P	- High chipping resistance in light to medium interrupted cutting - First choice for machining steel				
T9135 P30 - P40	TiCN-Al ₂ O ₃	16	P	- Excellent fracture resistance in heavy interrupted cutting				
T6120 P10 - P20 M10 - M20	TiCN	6	P M	- Good wear resistance in continuous cutting at high speed				
T6130 P15 - P30 M15 - M30	TiCN	6	P M	- High wear resistance in cutting at medium to high speed - First choice for machining stainless steel				
T515 K10 - K20	TiCN-Al ₂ O ₃	16	K	- Good wear resistance even in high-speed machining - First choice for roughing cast iron				
T5105 K05 - K15	TiCN-Al ₂ O ₃	16	K	- High resistance to wear and plastic deformation in continuous cutting at high speed				
T5115 K10 - K20	TiCN-Al ₂ O ₃	16	K	- Stable machining in a wide range of applications from continuous to interrupted cutting				
T5125 K15 - K30	TiCN-Al ₂ O ₃	16	K	- Strong resistance to sudden fracture - Ideal for heavy interrupted machining				
T313V -	TiCN-Al ₂ O ₃	3	Threading	- Good resistance to plastic deformation - Designed for threading				
T3225 P20 - P35 M20 - M35	TiCN-Al ₂ O ₃	10	P M	- High chipping and fracture resistance - Suitable for machining steel and stainless steel				
T3130 P20 - P40 M20 - M40	TiCN-Al ₂ O ₃	6	P M	- Good balance between wear and chipping resistance - Ideal for machining steel and stainless steel				
T1215 K10 - K25	TiCN-Al ₂ O ₃	10	K	- Good balance between wear and chipping resistance - Designed for machining cast iron				
T1115 K10 - K25	TiCN-Al ₂ O ₃	11	K	- High wear resistance - Ideal for machining cast iron				

PVD - Coated Grade

Grade	Coating		Application	Feature	Turning	Grooving	Milling	Drilling
	Main composition	Thickness / μm						
AH110 P05 - P15 M05 - M15 K10 - K25 S05 - S15	(Ti, Al)N	3	P M K S	- High wear resistance - Suitable for finishing steel, cast iron, and high-hardened material	Yes	No	No	No
AH120 P15 - P25 M15 - M25 K15 - K30 S10 - S25	(Ti, Al)N	3	P M K S	- Good balance between wear and fracture resistance - Suitable for machining steel, stainless steel, cast iron, and super alloys under general cutting conditions	Yes	Yes	Yes	Yes
AH130 P25 - P40 M25 - M40	(Ti, Al)N	3	P M	- High chipping and fracture resistance - Designed for machining austenitic stainless steel under general cutting conditions	No	No	Yes	No
AH140 M30 - M45	(Ti, Al)N	3	M	- High fracture resistance - Suitable for machining stainless steel	No	No	Yes	No
AH170 P20 - P35 M20 - M35 K15 - K30	(Ti, Al)N	3	P M K	- High wear resistance - Suitable for steel and cast iron drilling	No	No	No	Yes
AH180 P20 - P35 M20 - M35 K15 - K30	(Ti, Al)N	3	P M K	- High wear resistance - Suitable for steel, cast iron and stainless drilling	No	No	No	Yes
AH330 P15 - P30	(Ti, Al)N	3	P	- Excellent wear resistance	Yes	No	Yes	No
AH630 P15 - P30 M15 - M30	(Ti, Al)N	5	P M	- Good resistance to wear and fracture in machining stainless steel at low to medium cutting speed	Yes	No	No	No
AH645 P30 - P40 M30 - M40	(Ti, Al)N	5	P M	- High fracture resistance in machining stainless steel	Yes	No	No	No
AH710 P05 - P15 K05 - K15 H05 - H15	(Ti, Al)N	3	P K H	- High wear resistance - Ideal for finishing steel, cast iron and high-hardened material	Yes	Yes	Yes	No
AH725 P15 - P30 M15 - M30 K25 - K30 S15 - S25	(Ti, Al)N	2	P M K S	- Good balance between wear and chipping resistance - Suitable for machining steel and stainless steel under general cutting conditions	Yes	Yes	Yes	Yes
AH7025 P20 - P30 M20 - M30 S15 - S25	(Ti, Al)N	3.5	P M S	- Excellent wear resistance and high rigidity - First choice for grooving of various materials	No	Yes	No	No
AH730 P15 - P30	(Ti, Al)N	3	P	- Well-balanced between wear and fracture resistance	Yes	No	Yes	No
AH740 P25 - P40	(Ti, Al)N	3	P	- Excellent chipping resistance in machining steel	No	No	No	Yes
AH750 H15 - H30	(Ti, Al)N	3	H	- High wear resistance - Suitable for hard material machining	No	No	Yes	No
AH8005 M01 - M10 S01 - S10	(Al,Ti)N	3.5	M S	- Good balance between wear and fracture resistance - First choice for machining heat-resistant alloys under general cutting conditions	Yes	No	No	No
AH8015 M10 - M20 S10 - S20	(Al,Ti)N	3.5	M S H	- Strong resistance to wear and built-up edge	Yes	No	Yes	No
AH905 S01 - S10	(Al, Ti)N	1.5	S	- Strong resistance to wear and built-up edge	Yes	Yes	No	No

PVD - Coated Grade

Grade	Coating		Application	Feature	Turning	Grooving	Milling	Drilling
	Main composition	Thickness / μm						
AH3035 P20 - P45 H20 - H30	(Ti, Al)N	5	P H	- Good balance between wear and chipping resistance - Suitable for machining high-hardened material at high feed				
AH3135 P30 - P40 M30 - M40	(Ti, Al)N	4	P M	- High fracture resistance - Ideal for machining steel and stainless steel under general cutting conditions				
AH4035 M30 - M45	(Ti, Al)N	5	M	- Good balance for wear and fracture resistance - Suitable for difficult stainless steel machining				
AH6030 M25 - M35 S15 - S30	(Ti, Al)N	5	M S	- High fracture resistance - Ideal for drilling stainless steel and heat-resistant alloys under general cutting conditions				
AH9030 P15 - 35 K10 - 25	(Ti, Al)N	5	P K	- High wear resistance - Designed for drilling steel and cast iron at high speed				
SH725 P20 - P30 M20 - M30	(Ti, Al)N	2	P M	- Excellent wear resistance - Suitable for machining steel and stainless steel				
SH730 P20 - P35 M20 - M35 S05 - S15	(Ti, Al)N	1	P M S	- High wear resistance - Suitable for machining steel, stainless steel, and difficult-to-cut materials				
GH110 K10 - K25 N05 - N15	Ti(C, N, O)	3	K N	- Good wear resistance				
GH130 P25 - P40 M25 - M40 K25 - K40	Ti(C, N, O)	3	P M K	- High chipping and fracture resistance - Suitable for machining steel, stainless steel and cast iron				
GH330 P15 - P30 M15 - M30 K05 - K30	Ti(C, N, O)	3	P M K	- Strong resistance to wear and fracture - Suitable for continuous to medium interrupted cutting				
GH730 P20 - P35 M20 - M35 K20 - K30	Ti(C, N, O)	3	P M K	- High wear resistance - Ideal for turning and grooving at low speed				
J740 -	TiN	1	For small lathes	- Ultra-fine-grain cemented carbide coated with TiN-based compound				
YH170 P20 - P35 M20 - M35	Ti(C, N)	1.5	P M	- Strong resistance to wear and fracture - Suitable for steel and stainless drilling				
YH180 P20 - P35 M20 - M35	Ti(C, N)	1.5	P M	- High wear resistance - Suitable for steel and stainless drilling				
JM10 P20 - P35 M20 - M35	TiN	1	P M	- High wear resistance - Suitable for steel and stainless drilling				
DS1100 N05 - N20	DLC coating	Thin layer	N	- High wear resistance - Designed for finishing aluminum				
DS1200 N10 - N25	DLC coating	Thin layer	N	- Good balance between wear and chipping resistance - Ideal for semi-finishing to finishing of aluminum				

Ceramic

Grade	Specific gravity	Hardness (HRA)	T.R.S. (GPa)	Application	Feature				
						Turning	Grooving	Milling	Drilling
LX11	4.35	94.0	0.9	H	- Alumina base - Suitable for continuous cutting of high-hardened materials				
LX21	4.24	94.0	0.8	K	- Alumina base - Excellent chipping resistance in continuous cutting of cast iron				
FX105	3.24	93.0	1.3	K	- Silicon nitride base - Suitable for high-speed machining of cast iron				
CX710	3.20	92.9	1.1	K	- Silicon nitride base - Excellent performance in high-speed machining of cast iron				

Cermet

Grade	Coating		Application	Feature				
	Main composition	Thickness / μm			Turning	Grooving	Milling	Drilling
GT9530	Ti(C, N, O)	3	P K	- High wear resistance - Ideal for finishing with high surface quality				
J9530	TiN	1	For small lathes	- Suitable for small-part machining				
NS9530	Uncoated	-	P K	- High fracture resistance - Suitable for finishing to medium cutting of steel				
NS740	Uncoated	-	P	- Good resistance to fracture and thermal crack - Ideal for milling operations that require high rigidity				
NS520	Uncoated	-	P K	- Good wear resistance				
GT720	Ti(C, N, O)	3	P K	- Good wear resistance in high speed machining				
X407	Uncoated	-	P	- Good wear resistance for finish on dry machining				
N308	Uncoated	-	P	- Good wear resistance				

CBN (T-CBN)

Grade	Hardness (Hv)	T.R.S. (GPa)	Application	Feature	Turning	Grooving	Milling	Drilling
BXA20	3300 ~ 3500	1.30 ~ 1.50	H	- Excellent performance in machining hardened steel				
BXM10	2700 ~ 2900	0.80 ~ 0.90	H	- Suitable for machining hardened steel with continuous cutting at high speed				
BXM20	3500 ~ 3700	1.35 ~ 1.50	H	- First choice for machining hardened steel in a wide range of applications				
BXC50	3500 ~ 3700	1.15 ~ 1.30	H	- High fracture resistance in continuous to interrupted machining				
BX310	2700 ~ 2900	0.80 ~ 0.90	H	- Good wear resistance - Designed for continuous cutting of hardened steel at high speed				
BX330	2800 ~ 3000	0.85 ~ 0.95	H	- Excellent sharpness - Designed for finishing hardened steel				
BX360	3200 ~ 3400	1.00 ~ 1.10	H	- Suitable for general-purpose machining of hardened steel				
BX380	3500 ~ 3700	1.15 ~ 1.30	H	- High fracture resistance - Suitable for heavy interrupted cutting of hardened steel				
BX530	2800 ~ 3000	0.85 ~ 0.95	H	- Suitable for finishing hardened steel with high surface quality				
BXC90 (BX90S)	3900 ~ 4100	1.80 ~ 1.90	K	- Suitable for machining cast iron at high speed				
BX910	2600 ~ 2800	0.80 ~ 0.90	K	- Excellent wear resistance in high-speed machining - Ideal for machining centrifugally cast iron				
BX930	3000 ~ 3200	0.95 ~ 1.20	K	- Designed for machining ductile cast iron				
BX950	3900 ~ 4100	1.80 ~ 1.90	K S	- High fracture resistance - Good performance in high-speed machining				
BX850	3300 ~ 3500	0.75 ~ 0.85	H	- Suitable for hardened steel ball end milling				
BX870	3000 ~ 3200	0.95 ~ 1.20	K	- High wear resistance - Suitable for machining cylinder liners made of cast iron				
BX470	4100 ~ 4300	1.90 ~ 2.10	Sintered metal	- Excellent sharpness - Suitable for machining ferrous sintered metal				
BX480	4100 ~ 4300	1.90 ~ 2.10	Sintered metal	- Hardest grade of all T-CBN grades - Suitable for machining ferrous sintered metal				
M714B	3000 ~ 3200	1.00 ~ 1.10	S	- High wear resistance and thermostability - Good performance in high-speed machining of Inconel				

PCD (T-DIA)

Grades	Grain size (µm)	Hardness (Hv)	T.R.S. (GPa)	Application	Feature	Turning	Grooving	Milling	Drilling
DX110	< 1	8500	1.8	N	- Excellent sharpness for high surface quality - Suitable for finishing non-ferrous metal and nonmetal				
DX120	4.5	9000	1.8	N	- Suitable for precision machining of non-ferrous metal and nonmetal				
DX140	12.5	10000	1.7	N	- High wear resistance - Suitable for machining non-ferrous metal and nonmetal				
DX160	28	11000	1.6	N	- Designed for machining ceramic, cemented carbide, and nonmetal				
DX180	45	12000	1.5	N	- High wear resistance - Designed for ceramic, cemented carbide, and nonmetal				

Uncoated Cemented Carbide

Grades	Specific gravity	Hardness (HRA)	T.R.S. (GPa)	Application	Turning	Grooving	Milling	Drilling
UX30 P30 M30	12.6	91.1	2.3	P M				
TH10 P10 M10 K10 N10	14.7	92.0	2.4	P M K N				
KS05F K05 S05 N05	15.0	93.0	2.9	K S N				
KS15F N15	14.4	91.5	3.0	N				
KS20 K20 N20 S20	14.5	90.8	2.8	K S N				
TH03 P05 M05 K05 N05	13.8	93.8	1.9	P M K N				
F	14.9	93.4	2.5	P K				
EM10 P10 - P25 K10 - K25	14	91.5	3.4	P K				

Grades	Specific gravity	Hardness (HRA)	T.R.S. (GPa)	Application	Turning	Grooving	Milling	Drilling
UM K10 - K25 N10 - N25	13.9	90.9	3.5	K N				
G2 K10 - K25 N10 - N25	15	90.8	2.7	K N				
G1F P10 - P25 K10 - K25	15.1	92	2.6	P K				
MD10 P10 - P25 M10 - M25	15	92.8	3.4	P M				
MD20 P20 - P35 M20 - M35	14.4	91.5	3.9	P M				